

## TEST REPORT



Applicant	JUSTFOG DONGGUAN CO., LTD.
Address	BLDG, 3, DASHADUN INDUSTRIAL PARK, WUSHAJIANGBEI VILLAGE, CHANG'AN TOWN, DONGGUAN

Manufacturer or Supplier	JUSTFOG DONGGUAN CO., LTD.	
Address	BLDG, 3, DASHADUN INDUSTRIAL PARK, WUSHAJIANGBEI VILLAGE, CHANG'AN TOWN, DONGGUAN	
Product	Electronic Cigarette	
Brand Name	JUSTFOG	
Model	1453	
Additional Model & Model Difference	MAXI, See Section 2.1	
Date of tests	Jun. 27, 2014 ~ Jul. 02, 2014	

The submitted sample of the above equipment has been tested according to the following European Directive - Electromagnetic directive 2004/108/EC and the requirements of the following standards:

- EN 61000-6-3:2007 + A1:2011
- EN 61000-6-1:2007

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Tom Chen Project Engineer / EMC Department	Approved by Madison Luo Supervisor / EMC Department
	  Date: Jul. 10, 2014

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



# Table of Contents

RELEASE CONTROL RECORD ..... 4

1 SUMMARY OF TEST RESULTS ..... 5

1.1 MEASUREMENT UNCERTAINTY ..... 6

2 GENERAL INFORMATION ..... 7

2.1 GENERAL DESCRIPTION OF EUT ..... 7

2.2 DESCRIPTION OF TEST MODES ..... 7

2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 8

2.4 DESCRIPTION OF SUPPORT UNITS ..... 8

3 EMISSION TEST ..... 9

3.1 RADIATED EMISSION MEASUREMENT ..... 9

3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 9

3.1.2 TEST INSTRUMENTS ..... 10

3.1.3 TEST PROCEDURE ..... 11

3.1.4 DEVIATION FROM TEST STANDARD ..... 12

3.1.5 TEST SETUP ..... 13

3.1.6 EUT OPERATING CONDITIONS ..... 13

3.1.7 TEST RESULTS ..... 14

4 IMMUNITY TEST ..... 16

4.1 GENERAL DESCRIPTION ..... 16

4.1.1 GENERAL DESCRIPTION OF EN 61000-6-1 ..... 16

4.1.2 PERFORMANCE CRITERIA ..... 17

4.1.3 EUT OPERATING CONDITION ..... 17

4.2 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD) ..... 18

4.2.1 TEST SPECIFICATION ..... 18

4.2.2 TEST INSTRUMENTS ..... 18

4.2.3 TEST PROCEDURE ..... 19

4.2.4 DEVIATION FROM TEST STANDARD ..... 19

4.2.5 TEST SETUP ..... 20

4.2.6 TEST RESULTS ..... 21

4.3 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS) ..... 22

4.3.1 TEST SPECIFICATION ..... 22

4.3.2 TEST INSTRUMENTS ..... 22

4.3.3 TEST PROCEDURE ..... 23

4.3.4 DEVIATION FROM TEST STANDARD ..... 23

4.3.5 TEST SETUP ..... 24

4.3.6 TEST RESULTS ..... 25

4.4 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST ..... 26

4.4.1 TEST SPECIFICATION ..... 26

4.4.2 TEST INSTRUMENTS ..... 26

4.4.3 TEST PROCEDURE ..... 26

4.4.4 DEVIATION FROM TEST STANDARD ..... 26



4.4.5	TEST SETUP .....	27
4.4.6	TEST RESULTS .....	28
5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	29
6	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	31



**BUREAU  
VERITAS**

Test Report No.: CE140626N008

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
CE140626N008	Original release	Jul. 10, 2014



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>EMISSION</b>			
<b>Standard</b>	<b>Test Type</b>	<b>Result</b>	<b>Remarks</b>
EN 61000-6-3:2007 + A1:2011	Radiated Emission Test (30MHz ~ 1GHz)	PASS	Meets Limits Minimum passing margin is -10.01 dB at 881.66 MHz

<b>IMMUNITY (EN 61000-6-1:2007)</b>			
<b>Standard</b>	<b>Test Type</b>	<b>Result</b>	<b>Remarks</b>
IEC 61000-4-2:2008	Electrostatic discharge immunity test	PASS	Electrostatic Discharge – ESD: 8kV Air discharge, 4kV Contact discharge, Performance Criterion A
IEC 61000-4-3:2005 + A1:2007 + A2:2010	Radiated, radio-frequency, electromagnetic field immunity test	PASS	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80-1000 MHz, 3V/m, 80% AM (1kHz), 1400-2000 MHz, 3V/m, 80% AM (1kHz) 2000-2700 MHz, 1V/m, 80% AM (1kHz) Performance Criterion A
IEC 61000-4-8:2009	Power frequency magnetic field immunity test.	PASS	Power Frequency Magnetic Field Test, 50 Hz, 3A/m, Performance Criterion A



## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	30 MHz ~ 1GHz	+/- 4.04 dB



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Electronic Cigarette
<b>MODEL NO.</b>	1453
<b>ADDITIONAL MODEL</b>	MAXI
<b>POWER SUPPLY</b>	DC 3.7V from Li-ion battery
<b>CABLE SUPPLIED</b>	N/A
<b>THE HIGHEST OPERATING FREQUENCY</b>	Below 108MHz

#### NOTE:

1. For the test results, the EUT had been tested with all conditions. But only the worst case was showed in test report.
2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
3. Please refer to the EUT photo document (Reference No.: 140626N008) for detailed product photo.
4. Additional model MAXI is identical with the test model 1453 except the appearance and model number for marketing purpose.

### 2.2 DESCRIPTION OF TEST MODES

The EUT was tested under the following mode.

#### For all tests:

Normal Working
----------------



## 2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT has been tested and complied with the requirements of the following standards:

**EN 61000-6-3:2007 + A1:2011**

**EN 61000-6-1:2007**

IEC 61000-4-2:2008

IEC 61000-4-3:2005 + A1:2007 + A2:2010

IEC 61000-4-8:2009

**Notes:** The above IEC basic standards are applied with latest version if customer has no special requirement

The EUT is without AC input function and therefore the test items Conduction, Harmonic, Flicker, EFT, Surge, CS and Dip were not tested.

## 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit without any other necessary accessories or support units.





### 3 EMISSION TEST

#### 3.1 RADIATED EMISSION MEASUREMENT

##### 3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**TEST STANDARD: EN 61000-6-3**

**FOR FREQUENCY BELOW 1000 MHz**

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 – 1000	47	37

FREQUENCY (MHz)	Class A (at 3m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 – 230	50	40
230 – 1000	57	47

##### FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	Up to 5 times of the highest frequency or 6 GHz, whichever is less

**FOR FREQUENCY ABOVE 1000 MHZ**

FREQUENCY (GHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
1 to 3	76	56	70	50
3 to 6	80	60	74	54

- NOTE:** (1) The lower limit shall apply at the transition frequencies.  
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).  
(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

**3.1.2 TEST INSTRUMENTS****Frequency Range 30MHz-1GHz**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	100962	Mar. 06,14	Mar. 05,15
EMI Test Receiver	Rohde&Schwarz	ESU 26	100005	May 13,14	May 12,15
Bilog Antenna	Teseq	CBL 6111D	27089	Jun. 27, 14	Jun. 26, 15
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Dec. 03, 13	Dec. 02, 14
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-555	Dec. 03, 13	Dec. 02, 14
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8.8m	NSEMC006	May 15, 14	May 14, 15
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 05,14	Mar. 04, 15
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

**Frequency Range 1GHz-40GHz**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	100962	Mar. 06,14	Mar. 05,15
EMI Test Receiver	Rohde&Schwarz	ESU 26	100005	May 13,14	May 12,15
Pre-Amplifier (100MHz-26.5GHz)	EMCI	EMC 012645	980077	Jun. 16,14	Jun. 15,15
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04,13	Nov. 03,14
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

- NOTES:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.  
2. The test was performed in 10m Chamber.



Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	ETS-Lindgren	3117	00085519	Feb. 02,13	Feb. 01,15

**NOTE:** 1. The test was performed in 10m Chamber.  
 2. The calibration interval of the above test instruments is 24 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170242	Feb. 13,14	Feb. 12,17

**NOTE:** 1. The test was performed in 10m Chamber.  
 2. The calibration interval of the above test instruments is 36 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

### 3.1.3 TEST PROCEDURE

#### <Frequency Range below 1GHz>

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

**NOTE:**

- The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- Margin value = Emission level – Limit value.



### **<Frequency Range above 1GHz>**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter-to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test receiver/spectrum was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

#### **NOTE:**


1. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
2. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.

### **3.1.4 DEVIATION FROM TEST STANDARD**


No deviation

### 3.1.5 TEST SETUP

<Frequency Range below 1GHz>

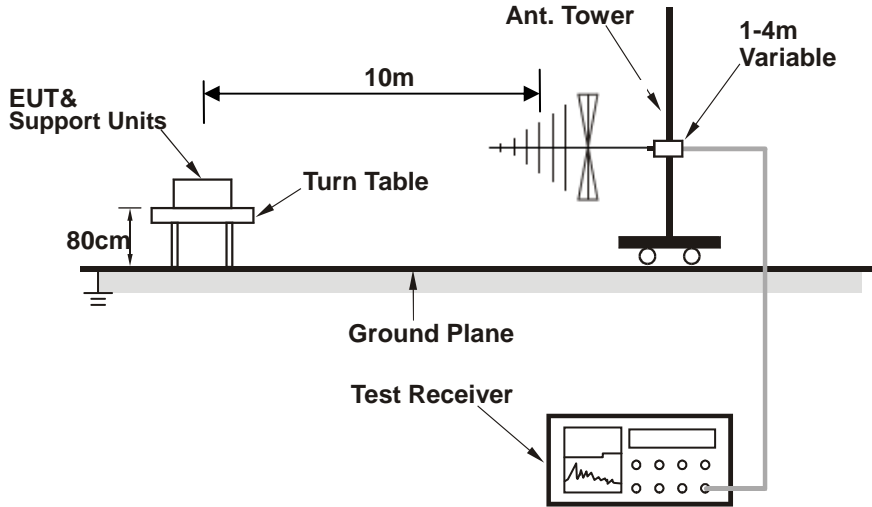

<Frequency Range above 1GHz>

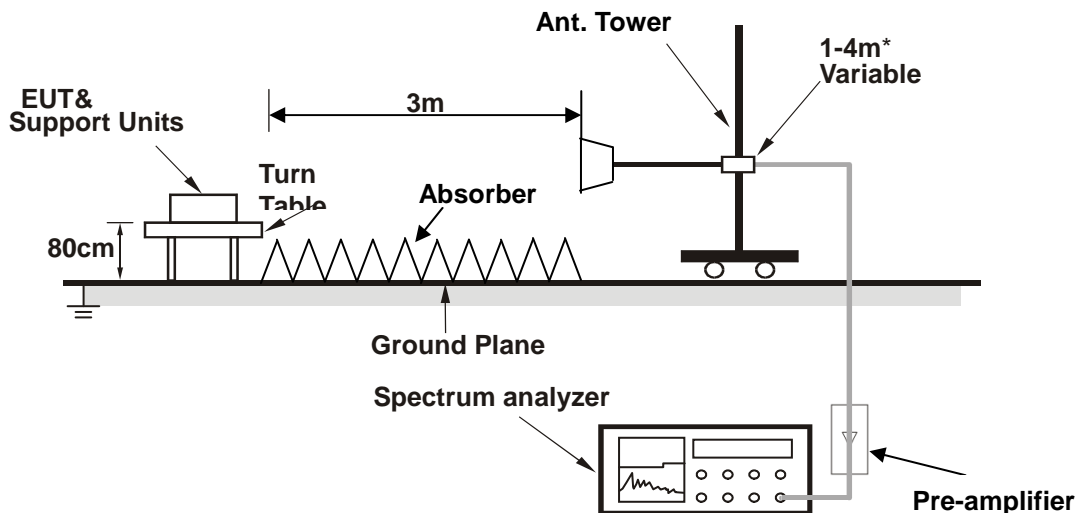

\* : depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3

### 3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power of all equipment.
- b. EUT was operated according to the type description in manufacturer's specifications or the User's Manual.




### 3.1.7 TEST RESULTS

<b>TEST MODE</b>	Normal Working	<b>FREQUENCY RANGE</b>	30-1000MHz
<b>TEST VOLTAGE</b>	DC 3.7V from Li-ion battery	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	26 deg. C, 56% RH	<b>TESTED BY:</b> Harry	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	161.92	-16.32	28.21	11.89	30.00	-18.11	100	20
2	272.50	-15.78	28.40	12.62	37.00	-24.38	100	20
3	450.98	-10.31	28.84	18.53	37.00	-18.47	100	20
4	639.16	-6.36	28.39	22.03	37.00	-14.97	100	349
5	784.66	-3.71	28.38	24.67	37.00	-12.33	100	1
6	881.66	-1.72	28.71	26.99	37.00	-10.01	100	13

**REMARKS:** The emission levels of other frequencies were very low against the limit.

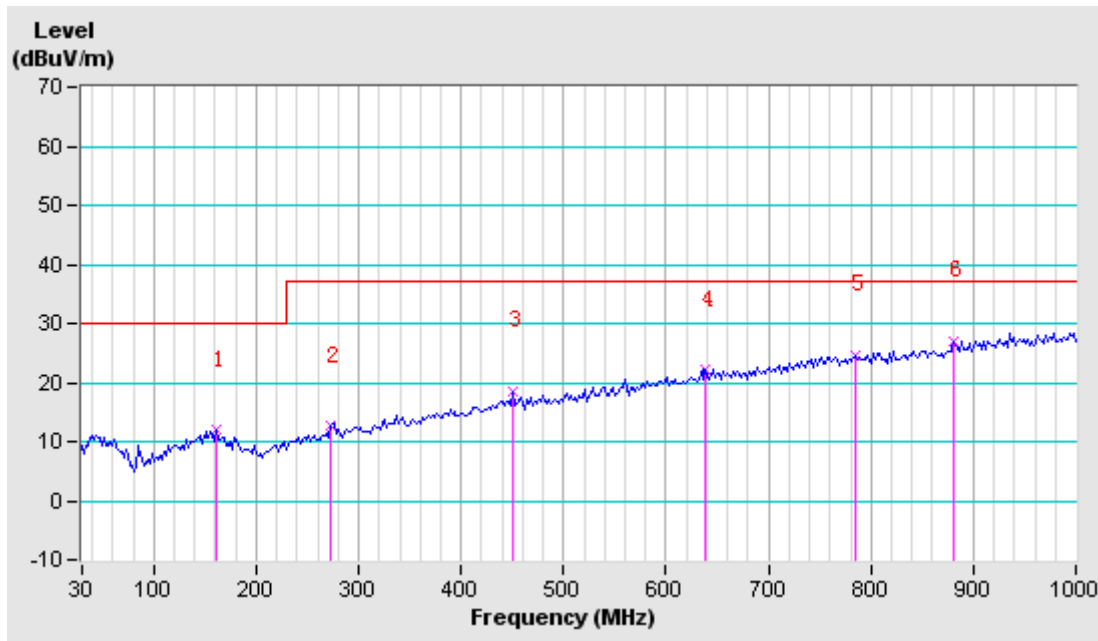




<b>TEST MODE</b>	Normal Working	<b>FREQUENCY RANGE</b>	30-1000MHz
<b>TEST VOLTAGE</b>	DC 3.7V from Li-ion battery	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	26 deg. C, 56% RH	<b>TESTED BY:</b> Harry	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 10 M</b>								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	39.70	-16.60	27.78	11.18	30.00	-18.82	100	0
2	140.58	-16.65	26.89	10.24	30.00	-19.76	100	2
3	297.72	-14.93	27.17	12.24	37.00	-24.76	100	12
4	441.28	-10.59	27.46	16.87	37.00	-20.13	100	27
5	559.62	-8.39	28.75	20.36	37.00	-16.64	100	42
6	639.16	-6.36	28.39	22.03	37.00	-14.97	100	54

**REMARKS:** The emission levels of other frequencies were very low against the limit.

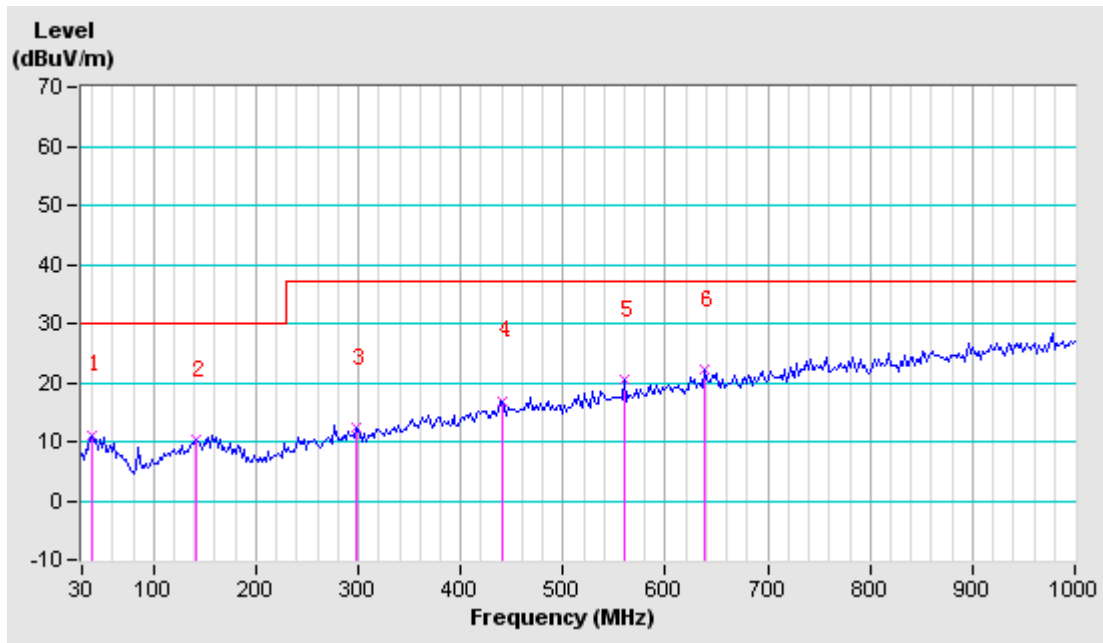



## 4 IMMUNITY TEST

### 4.1 GENERAL DESCRIPTION

#### 4.1.1 GENERAL DESCRIPTION OF EN 61000-6-1

<b>Product Standard:</b>	<b>EN 61000-6-1:2007</b>	
<b>Basic Standard, specification requirement, and Performance Criteria:</b>	IEC 61000-4-2	Electrostatic Discharge – ESD: 8kV air discharge, 4kV Contact discharge, Performance Criterion B
	IEC 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80-1000 MHz, 3V/m, 80% AM (1kHz), 1400-2000 MHz, 3V/m, 80% AM (1kHz) 2000-2700 MHz, 1V/m, 80% AM (1kHz) Performance Criterion A
	IEC 61000-4-8	Power Frequency Magnetic Field Test, 50 Hz, 3A/m, Performance Criterion A





### 4.1.2 PERFORMANCE CRITERIA

According to Clause 7.1 of EN 61000-6-1:2007 standard, the following describes the general performance criteria.

<b>CRITERION A</b>	The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
<b>CRITERION B</b>	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
<b>CRITERION C</b>	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

### 4.1.3 EUT OPERATING CONDITION

Same as item 3.1.6



## 4.2 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

### 4.2.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-2
<b>Discharge Impedance:</b>	330 ohm / 150 pF
<b>Discharge Voltage:</b>	Air Discharge: 8kV (Direct) Contact Discharge : 4 kV (Direct & Indirect)
<b>Polarity:</b>	Positive & Negative
<b>Number of Discharge:</b>	20 times at each test point
<b>Discharge Mode:</b>	Single Discharge
<b>Discharge Period:</b>	1 second minimum

### 4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
ESD Generator	TESEQ	NSG 437	279	Oct. 12, 13	Oct. 11, 14
Test Software	TESEQ	V03.03	N/A	N/A	N/A
ESD Generator	EM TEST	Dito	V1211112265	Jun. 19,14	Jun. 18,15
Test Software	EM TEST	V 2.31	N/A	N/A	N/A

- NOTE:** 1. The test was performed in ESD Room.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



### 4.2.3 TEST PROCEDURE

The basic test procedure was in accordance with IEC 61000-4-2:


- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the **Horizontal Coupling Plane** at points on each side of the EUT. The ESD generator was positioned horizontal at a distance of 0.1 meters from the EUT with the discharge electrode touching the **HCP**.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

### 4.2.4 DEVIATION FROM TEST STANDARD

No Deviation



## 4.2.5 TEST SETUP

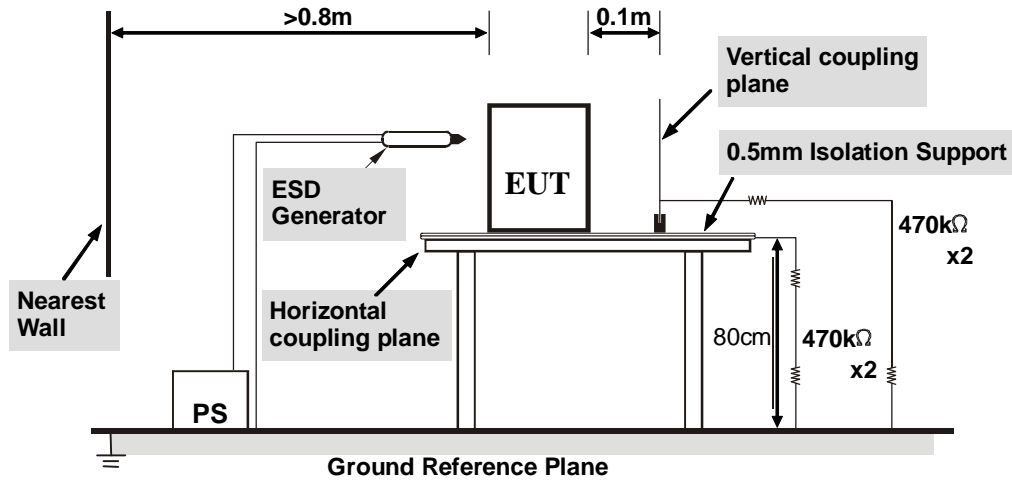

### NOTE:

#### TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940kΩ total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

#### FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.



### 4.2.6 TEST RESULTS

<b>TEST MODE</b>	Normal working	<b>TEST VOLTAGE</b>	DC 3.7V from Li-ion battery
<b>ENVIRONMENTAL CONDITIONS</b>	22.8 deg. C, 46.3% RH, 101.5kPa	<b>TESTED BY:</b> William	

DIRECT DISCHARGE APPLICATION				
Test Level (kV)	Polarity (+/-)	Test Point	Test Result of Contact Discharge	Test Result of Air Discharge
4	+/-	All Metal Parts	A	N/A
8	+/-	All Nonmetal Parts	N/A	A

INDIRECT DISCHARGE APPLICATION				
Test Level (kV)	Polarity (+/-)	Test Point	Test Result of HCP	Test Result of VCP
4	+/-	HCP&VCP	A	A

**NOTE:** A: There was no change compared with the initial operation during the test.



### 4.3 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

#### 4.3.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-3
<b>Frequency Range:</b>	80-1000MHz, 1400-2000MHz, 2000-2700MHz
<b>Field Strength:</b>	3 V/m,3V/m,1V/m
<b>Modulation:</b>	1kHz Sine Wave, 80%, AM Modulation
<b>Frequency Step:</b>	1 % of fundamental
<b>Polarity of Antenna:</b>	Horizontal and Vertical
<b>Antenna Height:</b>	1.5m
<b>Dwell Time:</b>	at least 3 seconds

#### 4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal Generator	Agilent	N5181A	MY50142530	Nov. 01,13	Oct. 31,14
Bilog Antenna	Teseq	CBL 6111D	25757	N/A	N/A
Antenna Log-Periodic	CORAD	ATS700M11G	0336821	N/A	N/A
Switch Controller	CORAD	SC1000	0337343	N/A	N/A
RF Power Meter	ESE	4242	13984	Nov. 04,13	Nov. 03,14
Power Sensor	ESE	51011EMC	35716	Nov. 04,13	Nov. 03,14
Power Sensor	ESE	51011EMC	35715	Nov. 04,13	Nov. 03,14
E-Field probe	Narda	NBM-520	2403/01B	May 07,13	May 06,14
Power Amplifier	TESEQ	CBA 1G-150	T44029	N/A	N/A
Power Amplifier	TESEQ	CBA 3G-100	T44030	N/A	N/A
Power Amplifier	TESEQ	CBA 6G-050	1041204	N/A	N/A
Dual Directional Coupler	TESEQ	C5982	95208	Dec. 23,13	Dec. 22,14
Dual Directional Coupler	TESEQ	C6187	95175	Dec. 23,13	Dec. 22,14
Dual Directional Coupler	TESEQ	CPH-274F	M251304-01	Dec. 23,13	Dec. 22,14
Test Software	ADT	BVADT_RS_V7.6.4-DG	N/A	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in RS chamber.



### 4.3.3 TEST PROCEDURE

The test procedure was in accordance with IEC 61000-4-3


- a. The testing was performed in a fully-anechoic chamber.
- b. The frequency range is swept from 80 MHz to 1000 MHz, 1400MHz to 2000MHz, 2000MHz to 2700MHz with the signal 80% amplitude modulated with a 1kHz sine wave.
- c. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to respond, but shall in no case be less than 0,5s.
- d. The field strength levels were 3V/m, 1V/m.
- e. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

### 4.3.4 DEVIATION FROM TEST STANDARD

No Deviation



### 4.3.5 TEST SETUP

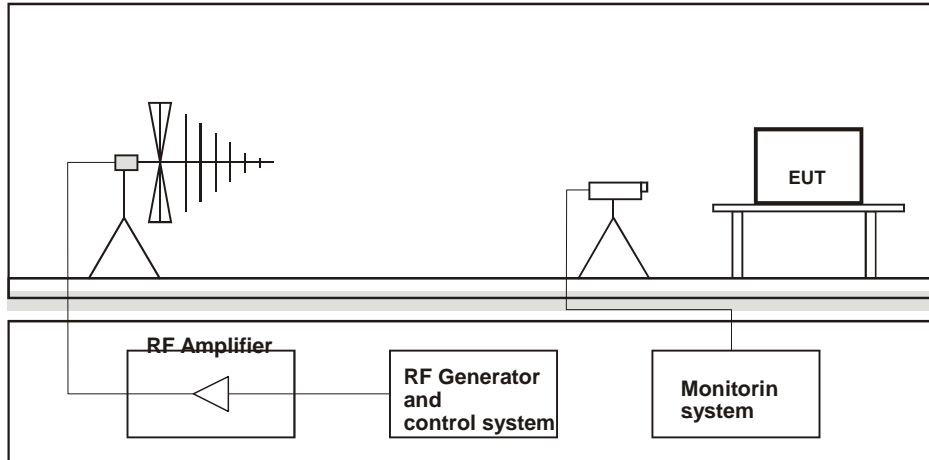

#### NOTE:

##### TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

##### FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.





### 4.3.6 TEST RESULTS

<b>TEST MODE</b>	Normal Working	<b>TEST VOLTAGE</b>	DC 3.7V from Li-ion battery
<b>ENVIRONMENTAL CONDITIONS</b>	25.1deg. C, 52.3% RH	<b>TESTED BY:</b> William	

Field Strength (V/m)	Test Frequency Note <sup>#1</sup> (MHz)	Polarization of antenna (Horizontal / Vertical)	Test Distance (m)	Test Result	Remark
3	80 - 1000	H&V	3	A	N/A
3	1400 - 2000	H&V	3	A	N/A
1	2000 - 2700	H&V	3	A	N/A

**NOTE:** A: There was no change compared with initial operation during the test



## 4.4 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST

### 4.4.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-8
<b>Frequency Range:</b>	50Hz, 60Hz
<b>Field Strength:</b>	3A/m
<b>Observation Time:</b>	1 minute
<b>Inductance Coil:</b>	Rectangular type, 1mx1m

### 4.4.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Magnetic Field Tester	HAEFELY	MAG100.1	150579	Oct.18,13	Oct.17,14
Test software	N/A	N/A	N/A	N/A	N/A

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.  
 2. The test was performed in 844 shielded Room.

### 4.4.3 TEST PROCEDURE


- The equipment is configured and connected to satisfy its functional requirements.
- The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

### 4.4.4 DEVIATION FROM TEST STANDARD

No Deviation



## 4.4.5 TEST SETUP

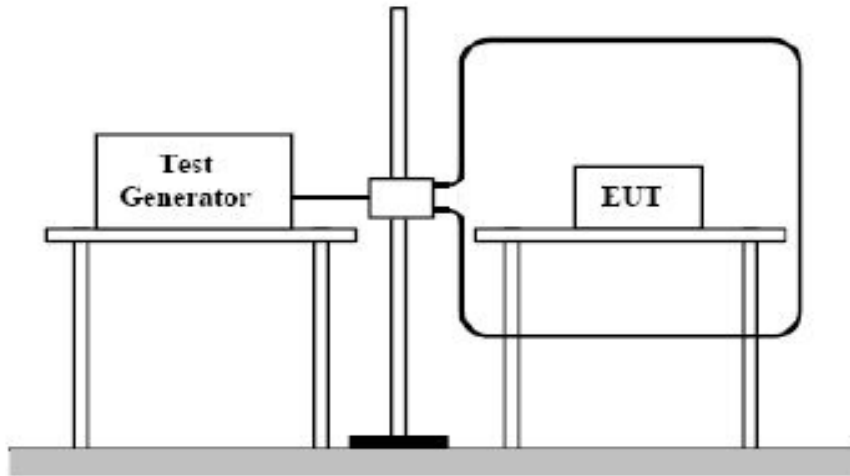

### NOTE:

#### TABLETOP EQUIPMENT

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

#### FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.



### 4.4.6 TEST RESULTS

<b>TEST MODE</b>	Normal Working	<b>TEST VOLTAGE</b>	DC 3.7V from Li-ion battery
<b>ENVIRONMENTAL CONDITIONS</b>	23.4deg. C, 55% RH	<b>TESTED BY:</b> Xue Wang	


<b>Magnetic field direction</b>	<b>Testing result</b>	<b>Remark</b>
X - Axis	A	3A/m
Y - Axis	A	3A/m
Z - Axis	A	3A/m

**NOTE:** A: There was no change compared with initial operation during the test.




## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION


### RADIATED EMISSION TEST < 30MHz~1GHz >

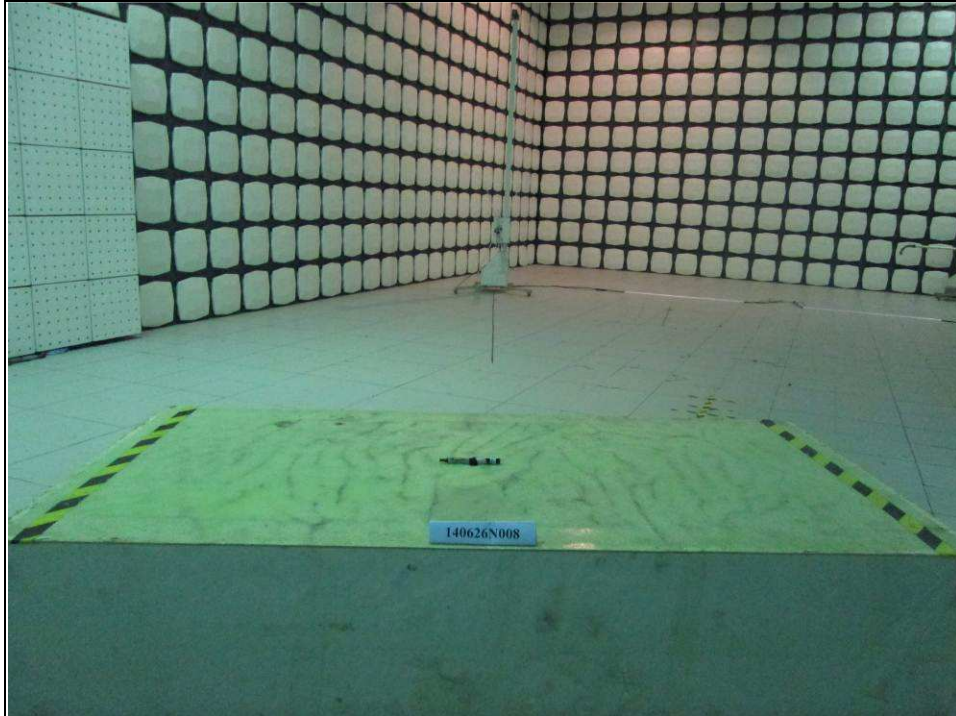

### ESD TEST

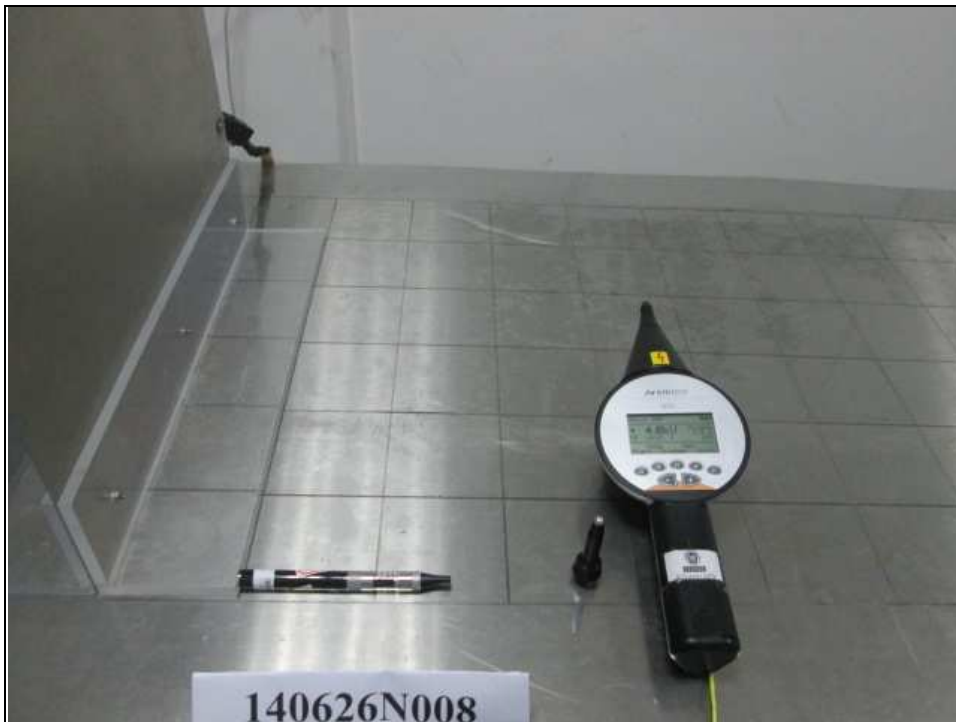

RS TEST

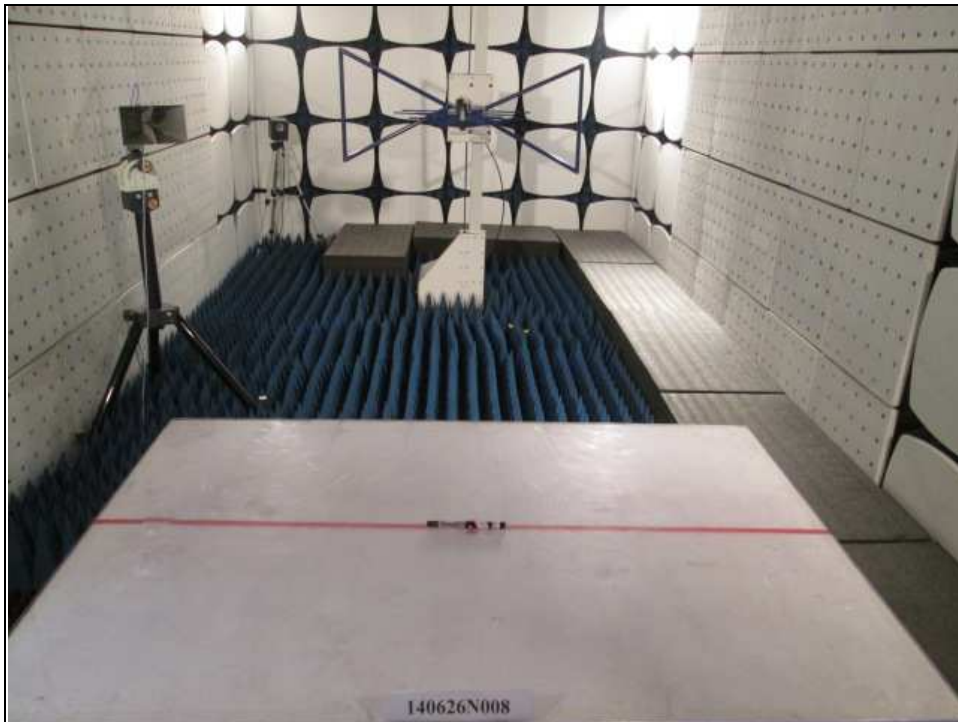

POWER-FREQUENCY MAGNETIC FIELDS TEST





## **6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications were made to the EUT by the lab during the test.

---END---